


MIG/MAG TORCHES

WMT2

Simple and reliable, this range is adapted to the most common applications.


STANDARD RANGE



Easy pivoting handle.



Wear parts compatible with the most common standard in Europe.

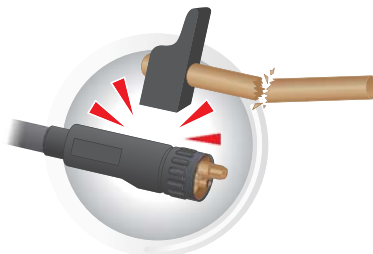

Extra length rear cable support ensure smooth and consistent wire feeding.



Extra-flexible cable.



2014-670

Air cooling

MODEL	WMT2-15A	WMT2-25A	WMT2-36A
Duty cycle [CO ₂ shielding gas]	180 A @ 60%	230 A @ 60%	300 A @ 60%
Applications	Thin plates, automotive industry	Thin plates, light fabrication	Vessel manufacture, steel structures
Wire diameter	Up to 1.0 mm	Up to 1.2 mm	Up to 1.6 mm
Original equipment	Contact tip	0.8 mm	1.0 mm
	Conical nozzle	12 mm	15 mm
To order			
3 m	W000277445	W000277473	W000277482
4 m	W000277447	W000277474	W000277483
5 m	-	W000277475	W000277484

Water cooling

MODEL	WMT2 401W	WMT2 500W	WMT2 500WL
Duty cycle [CO ₂ shielding gas]	460 A @ 100%	500 A @ 100%	500 A @ 100%
Applications	Heavy duty, high production	Heavy duty, high production	Heavy duty, high production
Wire diameter	Up to 1.6 mm	Up to 2.4 mm	Up to 2.4 mm
Lance length	-	34 cm	42 cm
Original equipment	Contact tip	1.2 mm	1.2 mm
	Conical nozzle	16 mm	16 mm
To order			
3 m	W000370826	W000277492	W000277533
4 m	W000370827	W000277493	W000277534
5 m	W000370828	W000277494	W000277535

